X303-2 Wire IP telefon

Opis

X303-2 Wire IP telefon je unapređena verzija originalnog IP telefona X303P, opremljen potpuno novim načinom umrežavanja i napajanja putem dvožične veze. Ovo nudi upotrebu starog ožičenja na potpuno novi način, obezbeđujući tako i HD prenos glasa. Fanvil X303-2 Wire ima ekran u boji dijagnole 2.4 inča, podržava 4 SIP naloga, 2-žično napajanje i umrežavanje, konferencijsku vezu sa više učesnika, i druge pogodne funkcije. Pored toga, podržava eksterne EHS bežične naglavne slušalice, kao i druge funkcije proširenja, što ga čini pogodnim za različite scenarije primene poslovnih aplikacija, i pruža odlično korisničko iskustvo.

Glavne karakteristike

- Povezuje se putem RJ11 interfejsa i podržava 2-žično napajanje i umrežavanje
- Ekran u boji 2.4 inča zadovolkjava različite potrebe primene
- Razgovetni razgovori sa glasom visoke definicije
- Podržava 6-ostranu konferencijsku vezu
- Omogućeno postavljanje na sto pod dva ugla i nazidnu montažu

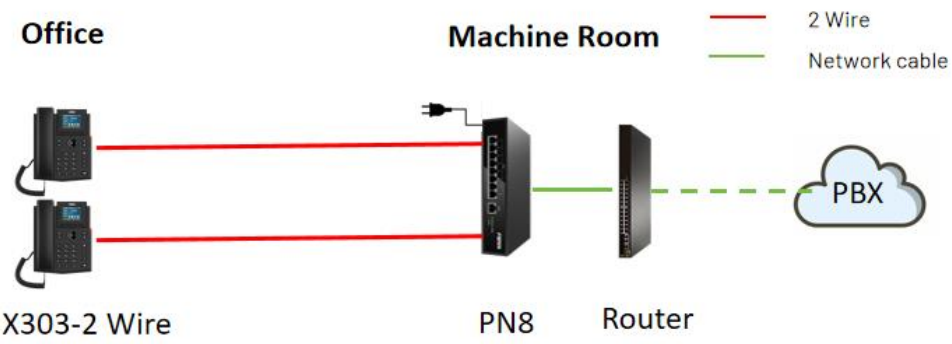

ImpulsT

Specifikacija

Primena	Kancelarije, zdravstvene ustanove, stambeni objekti
Ekran / tastatura	2.4 inča kolor ekran 320×204 4 “Soft” tastera 9 funkcijskih tastera (Hold / Transfer / Voicemessage / Conference / Phonebook / MWI / Headset / Redial / Hands-free) 3 linijska tastera (sa LED svetlosnom indikacijom) 4 navigaciona tastera + 1 OK taster 12 standardnih numeričkih tastera 3 tastera za kontrolu jačine zvuka (pojačaj / smanji / isključi mikrofon)
Kućište	plastično
Boja	Crna
Statusno svetlo	1（crveno）
Interfejs	Žična utičnica (6P2C RJ11) Strujna utičnica RJ9 utičnica（za MTK-ručni set x 1, za naglavne slušalice x 1） Sigurnosni slot x1
Napajanje	DC 12V/1A Napajanje putem 2-Wire PoE Switch-a
Dimenzije	Stona postavka (45°): 169x203.6x172.7 mm Stona postavka (50°): 169x194x181 mm Zodna montaža: 169x113.4x207.6 mm
Temperatura	0℃- +45℃
Montaža	Stona Na zid (neophodan opcioni nosač za zid)

Funkcionalne mogućnosti

Protokoli	SIP2.0 preko UDP/TCP/TLS, RTP/RTCP/SRTP, STUN, DHCP, IPv6, LLDP, PPPoE, 802.1x, L2TP, OpenVPN, SNTP, FTP/TFTP, HTTP/HTTPS, TR-069, AES128 & AES256
Audio	HD Voice mikrofon / zvučnik (ručni set / spikerfon, 0 ~ 7KHz frekventni raspon) Širokopojasni ADC/DAC 16kHz uzorkovanje Uskopojasni kodek: G.711a/u,G.723.1, G.726, G.729A/B, iLBC Širokopojasni kodek: G.722, Opus Kompletno dvosmerna akustična eliminacija eha (AEC) Detekcija aktivacije glasa (VAD) / udobno stvaranje šuma (CNG) / procena pozadinskog šuma (BNE) / redukcija šuma (NR) / automatska kontrola pojačanja (AGC) Prikrivanje gubitka paketa (PLC) Dinamčko prilagođavanje treperenja DTMF: In-band, Out-of-Band (RFC2833/ SIP INFO) VQM nadzor kvaliteta glasa

ImpulsT

Mreža	IP Mod:IPv4/IPv6 IP konfiguracija: Static IP / DHCP / PPPoE Kontrola mrežnog pristupa: 802.1x VPN: L2TP / OpenVPN VLAN LLDP QoS RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
Telefonske funkcije	Lokalni telefonski imenik (1000 unosa) Udaljeni telefonski imenik (XML/LDAP, 1000 unosa) Evidencija poziva (dolaz / odlaz / propušteni, 600 zapisa) Lista blokiranih / lits dozvoljnih Štednja ekrana Ondikacija glasoven poruke (VMWI) Programibilni DSS / Soft tateri Mrežna sinhronizacija vrmena Podrška za Plantronics bežične slušalice (uz Plantronics APD-80 EHS kabl) Podrška za Jabra bežične slušalice (uz Fanvil EHS20 EHS kabl) Podržava snimanje (kroz server / IP PBX) URL radnje / aktivni URI uaCSTA
Funkcije poziva	Call out / Answer / Reject Mute / Unmute (Microphone) Call Hold / Resume Call Waiting Intercom Caller ID Display Speed Dial Anonymous Call (Hide Caller ID) Call Forward (Always/Busy/No Answer) Call Transfer (Attended/Unattended) Call Parking/Pick-up (Depending on server) Redial Do-Not-Disturb Auto-Answering Voice Message (With server) 6-way Conference Hot Line Hot desking
Upravljanje raspoređivanjem	Auto-Provisioning via FTP/TFTP/HTTP/HTTPS/DHCP OPT66/SIP PNP/TR-069 Web Management Portal Web-based Packet Dump Configuration Export / Import Phonebook Import/Export Firmware Upgrade Syslog

ImpulsT